

### COLOURS

Available colours:



Housing	Inside ring
RAL 9016	
Matt white	Gold (XX=61)
Matt white	Silver (XX=63)
Matt white	Copper (XX=64)
Matt white	Black (XX=62)



Housing	Inside ring
RAL 9005	
Matt black	Gold (XX=71)
Matt black	Silver (XX=74)
Matt black	Copper (XX=75)
Matt black	Black (XX=72)

## SensorVector 100

Surface mounted

### SPECIFICATIONS

Beam angle (FWHM)	60°
Fixture material	Die cast aluminium
Environment	Indoor
IK rate	IK03
Operating temperature (Ta)	-20°C / +45°C
Safety marks	EN60598 / EN62031 / EN62471
EMC compliance	EN55015
Colour consistency (SDCM)	MacAdam step 3
Warranty	7 years * (within the European Union and the countries of the Free Trade Association for products delivered after 1 May 2015)
Safety class	II
Energy class	A

This luminaire contains built-in LED lamps. There are no exchangeable parts inside the luminaire. EU 874/2012



Sensor luminaires turn on for 4 minutes after detecting movement. A different time can be set for large orders.



## SENSORVECTOR 100 LV 3000K / 4000K

### ITEM SPECIFICATIONS (PART A)

Description	Item code	Extra	Input	W	Lm	Lm/W	CRI (typ.)
SensorVector 100 LV 600 Lm 3000K 60°	787203XX8814	incl. PSU	220-240V	8,0	600	75	83
SensorVector 100 LV 600 Lm 4000K 60°	787203XX9814	incl. PSU	220-240V	8,0	600	75	83

### ITEM SPECIFICATIONS (PART B)


Description	UGR	Pf	Ripple	Inrush	B16A
SensorVector 100 LV 600 Lm 3000K 60°	22.0	0.6	<3%	20A 170µS	50
SensorVector 100 LV 600 Lm 4000K 60°	22.0	0.6	<3%	20A 170µS	50

### ITEM SPECIFICATIONS (PART C)


Description	Safety class	Energy class	Weight	Dimensions single carton	Quantity per carton	Expected lifespan (25°C)		
						L70B50	L80B50	L90B50
SensorVector 100 LV 600 Lm 3000K 60°	II	A	468 gr	105x105x105 mm	35 pcs	282.168 hrs	178.352 hrs	87.206 hrs
SensorVector 100 LV 600 Lm 4000K 60°	II	A	468 gr	105x105x105 mm	35 pcs	282.168 hrs	178.352 hrs	87.206 hrs

All values are measured at 230V (+/- 7%)

### DIMENSIONS



### FIXATION DIMENSIONS

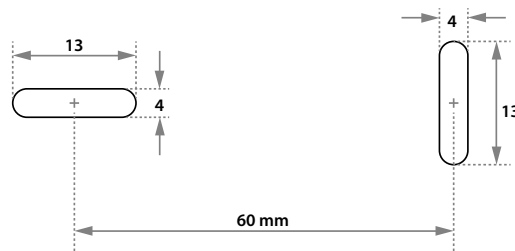

### DETECTION AREA

