

Industrial 6.0



Industrial:LED 6.0 MINI

IND6-MINI-WW	24	3750	3000K	>80	IP 66	110°	1,2kg
IND6-MINI-NW	24	3900	4000K	>80	IP 66	110°	1,2kg
IND6-MINI-DW	24	3950	5000K	>80	IP 66	110°	1,2kg

Industrial:LED 6.0 I

IND6-I-WW	32	5450	3000K	>80	IP 66	110°	2,0kg
IND6-I-NW	32	5650	4000K	>80	IP 66	110°	2,0kg
IND6-I-DW	32	5700	5000K	>80	IP 66	110°	2,0kg









Industrial:LED 6.0 II

IND6-II-WW	42	7200	3000K	>80	IP 66	110°	2,0kg
IND6-II-NW	42	7450	4000K	>80	IP 66	110°	2,0kg
IND6-II-DW	42	7500	5000K	>80	IP 66	110°	2,0kg









Industrial:LED 6.0 III

IND6-III-WW	66	11500	3000K	>80	IP 66	110°	2,4kg
IND6-III-NW	66	11850	4000K	>80	IP 66	110°	2,4kg
IND6-III-DW	66	11900	5000K	>80	IP 66	110°	2,4kg









Industrial:LED 6.0 IV

							
IND6-IV-WW	97	16000	3000K	>80	IP 66	110°	2,4kg
IND6-IV-NW	97	16500	4000K	>80	IP 66	110°	2,4kg
IND6-IV-DW	97	16550	5000K	>80	IP 66	110°	2,4kg


Industrial:LED 6.0 OPT1






							
IND6-OPT1-WW	47	7400	3000K	>80	IP 66	60°	2,6kg
IND6-OPT1-NW	47	7800	4000K	>80	IP 66	60°	2,6kg
IND6-OPT1-DW	47	7800	5000K	>80	IP 66	60°	2,6kg

Industrial:LED 6.0 OPT2

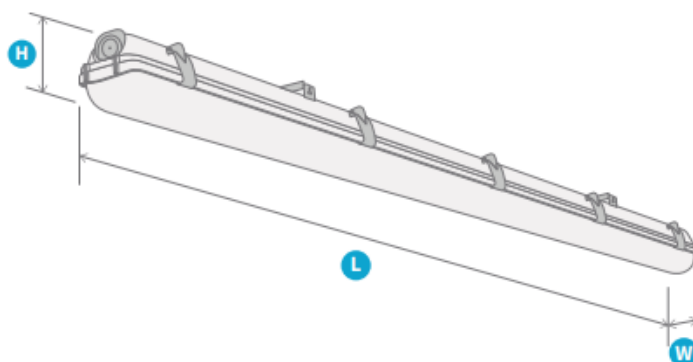							
IND6-OPT2-WW	70	10850	3000K	>80	IP 66	60°	2,6kg
IND6-OPT2-NW	70	11400	4000K	>80	IP 66	60°	2,6kg
IND6-OPT2-DW	70	11400	5000K	>80	IP 66	60°	2,6kg


Dimensions and Logistics



	H	L	W				
IND6-MINI	104	660	97	IND6-MINI	10	100	160x80
IND6-I	80	1277	97	IND6-I	10	100	160x80
IND6-II	80	1277	97	IND6-II	10	100	160x80
IND6-III	80	1573	97	IND6-III	10	100	160x80
IND6-IV	80	1573	97	IND6-IV	10	100	160x80
IND6-OPT	80	1573	97	IND6-OPT	10	100	160x80



Luminous Intensity Distribution

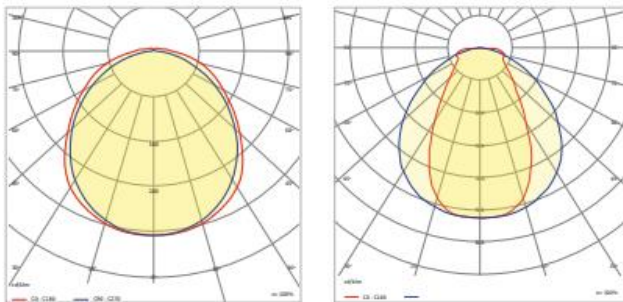

Available Configurations



Size	MINI	I	II	III	IV
1 Color temperature	WW 3000K	NW 4000K	DW 5000K		
2 Optyka	110° Beam angle				
3 Material D-Diffuser/ H-Housing	D1 PC (IK08) H1 PC	D2 PMMA (IK03) H3 GRP			
4 Control	DALI DALI				
5 Extras (I,II,III)	PRO -30°C to +50°C	96M 8 years warranty	120M 10 years warranty	OPT1 version with OPT2 60° optics***	
	TW Through wiring	QC Quick coupler	Back-up module		